




SGS International Ltd.

had been incorporated in Liechtenstein, Schaan with aim to offer the customers a comprehensive range of innovative, science-based dental solutions. SGS Dental Implant System is not only a dental product, but it is about art and experience in clinical practice as well.

Thanks to qualitative Swiss technology, SGS Dental Implant System provides excellent products at competitive prices with strong support. We use the most precise tools and equipment with the best raw materials, that is why SGS became one of market leaders in the dental implant industry. Our system is used by thousands of professionals all around the world.

TABLE OF CONTENTS

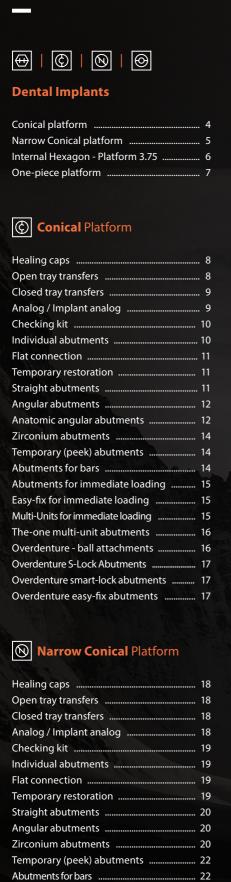

Hatform 3.75

Healing caps	24
Open tray transfers	24
Closed tray transfers	25
Analog / Implant analog	25
Checking kit	26
Individual abutments	26
Flat connection	27
Temporary restoration	27
Straight abutments	27
Angular abutments	28
Anatomic angular abutments	28
Zirconium abutments	30
Temporary (peek) abutments	30
Abutments for bars	30
Abutments for immediate loading	31
Easy-fix for immediate loading	31
Multi-Units for immediate loading	31
The-one multi-unit abutments	32
Overdenture - ball attachments	32
Overdenture S-Lock Abutments	33
Overdenture smart-lock abutments	33
Overdenture easy-fix abutments	33

⊙ One-pi

Transfers	34
Analogs	34
Keys/Drivers	34

Surgical Kits

Basic kit & straight / spiral drill kit	36-39
Advanced kit $\&$ straight / spiral drill kit $\ \dots$	40-41
Guided Surgery Kit	42-43
Prosthetic Kit	44-45
Conical stopper drill kit	46-47
Other drills	47
Short drills	47

CAD - CAM

Platforms & description	48-50
-------------------------	-------









P5D DENTAL IMPLANT

NEW





ConicalPlatform

Slightly aggressively threaded Implant, beneficial for all bone types with a hybrid design aimed to make it an all-around performer, delivering both high Primer Stability and Hard-Bone compatibility, with Shift Platform and a Conical connection.

Ø3.5mm	Ø3.75mm	Ø4.2mm	Ø4.5mm	Ø5.0mm	Ø6.0mm
// / /	////	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm
		18 mm			
		20 mm			
		22 mm			

P5G DENTAL IMPLANT

NEW





Conical Platform

Biological Tissue Level implant, Slightly aggressively threaded Implant, beneficial for all bone types with a hybrid design aimed to make it an all-around performer, delivering both high Primer Stability and Hard-Bone compatibility, with Shift Platform and a Conical connection.

Ø3.5mm	Ø3.75mm	Ø4.2mm	Ø4.5mm	Ø5.0mm	Ø6.0 _{mm}
1//	1///	6 mm	6 mm	6 mm	6 mm
8 mm					
10 mm					
11.5 mm					
13 mm					
16 mm					
		18 mm			
		20 mm			
		22 mm			





Densely threaded Implant, extremely beneficial for Hard-Bone (mandibular, D1 & D2), with Shift Platform and Conical connection.

Ø3.5mm	Ø3.75mm	Ø4.2mm	Ø5.0mm
///-/	////	11/1-1	6 mm
8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm



P7D DENTAL IMPLANT



Conical Platform

Aggressively threaded Implant, beneficial for D3 and D4 bone types with high primer stability, with Shift Platform and Conical connection.





P7N DENTAL IMPLANT



Narrow Conical Platform

Slightly aggressively threaded Implant, beneficial for all bone types where space is scarce and a specialty solution is required, with Shift Platform and a Narrow Conical connection.

////	
Ø3.0 _{mm}	Ø3.2mm
////-/	8 mm
10 mm	10 mm
11.5 mm	11.5 mm
13 mm	13 mm
16 mm	16 mm











P1 DENTAL IMPLANT





Densely threaded Implant, extremely beneficial for Hard-Bone (mandibular, D1 & D2), with Internal Hexagon connection.

Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø5.0mm	Ø6.0 _{mm}
///-/	////	1///	6 mm	6 mm
8 mm				
10 mm				
11.5 mm				
13 mm				
16 mm				

P7 DENTAL IMPLANT





Platform 3.75

Aggressively threaded Implant, beneficial for D3 and D4 bone types with high primer stability, with Internal Hexagon connection.

Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø4.5mm	Ø5.0mm	Ø6.0 _{mm}
///-/	////	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm



One-piece Platform

One-Piece implant, with 3 restoration options in Snap, Cemented, and Screw retained, Slightly aggressively threaded Implant, beneficial for all bone types with a hybrid design aimed to make it an all-around performer, delivering both high Primer Stability and Hard-Bone compatibility.

Ø3.0mm	Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø5.0mm	Ø6.0 _{mm}
1///	///-/	////-/	1///	6 mm	6 mm
	8 mm				
10 mm					
11.5 mm					
13 mm					
16 mm					



NEW

P9S DENTAL IMPLANT



One-piece Platform

One-Piece implant, with 4 restoration options in Snap, Cemented, Screw retained, Compressively threaded implant, good for all bone types.

Ø2.4mm	Ø3.0mm	Ø3.2mm	Ø3.5mm	Ø4.2mm	Ø5.0mm
///	1///	1///-/	////	////	6 mm
	8 mm				
10 mm					
11.5 mm					
13 mm					
16 mm					






HEALING CAPS //

	Product code	Available sizes	Additional info/parts
H Ø 4.7 →	HAD Healing cap	1 mm (Ref: D10471) 2 mm (Ref: D10472) 3 mm (Ref: D10473) 4 mm (Ref: D10474) 5 mm (Ref: D10475) 6 mm (Ref: D10476)	Suitable for all implant diameters.
H	HWD Wide healing cap	3 mm (Ref: D10583) 5 mm (Ref: D10585)	Suitable for all implant diameters.
H Ø 7,0	HW7D Wide healing cap	3 mm (Ref: D10703) 5 mm (Ref: D10705)	WIDE Suitable for all implant diameters.
H Ø8.0	HW8D Wide healing cap	3 mm (Ref: D10803) 5 mm (Ref: D10805)	WIDE Suitable for all implant diameters.
H Ø3.8	HND Narrow healing cap	2 mm (Ref: D10382) 3 mm (Ref: D10383) 4 mm (Ref: D10384)	NARROW Suitable for all implant diameters.

OPEN TRAY TRANSFERS //

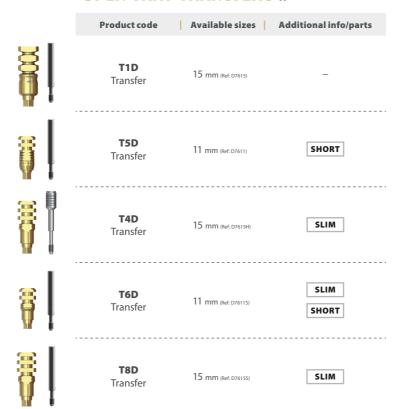



Recommended tightening torque max. 10 Ncm for the screw.

ANALOG / IMPLANT ANALOG //

Additional info/parts | Available sizes | Product code

Analog 12 mm (Ref. Dos) A1D





PROSTHETIC ACCESSORIES



CHECKING KIT //

	Product code	Available sizes	Additional info/parts
	СКД	(Ref. D81)	position checking tool - 0°
15°	CKD - 15°	(Ref. D8115)	position checking tool - 15°
25°	CKD - 25°	(Ref. D8125)	position checking tool - 25°
35°	CKD - 35°	(Ref: D8135)	position checking tool - 35°
45°	CKD - 45°	(Ref. D8145)	position checking tool - 45°

INDIVIDUAL ABUTMENTS //

	Product code	Available sizes	Additional info/p	arts	
	S1PNHD Abutment for casting	11 mm (Ref: D82)	Two screws included * :		
	S1PND Abutment for casting	0 11 mm (Ref: D81)	Two screws included *:		
W.	S1PTD Abutment for casting	11 mm (Ref: D83)	Two screws included *: ! Plastic/Titanium		
W	S1PCHD Abutment for casting	11 mm (Ref: D85)	Two screws included *: ! Plastic/Chrome-cobalt		
Yer	S1PCD Abutment for casting	11 mm (Ref: D84)	Two screws included *: ! Plastic/Chrome-cobalt		

FLAT CONNECTION //



TEMPORARY RESTORATION //





STRAIGHT ABUTMENTS //


Additional info/pa	arts	Available sizes	Product code
Two screws included * :		5 mm (Ref: D115) 7 mm (Ref: D117) 9 mm (Ref: D119) 12 mm (Ref: D1112) 15 mm (Ref: D1115)	S1D Straight abutment
Two screws included * :		1 mm (Ref: D121) 2 mm (Ref: D122) 3 mm (Ref: D123) 4 mm (Ref: D124)	S1AD Anatomic straight abutment
NARROW Two screws included *:		7 mm (Ref: D11N7) 9 mm (Ref: D11N9)	S1ND Straight narrow abutment
WIDE Two screws included *:		9 mm (Ref: D11W9) 12 mm (Ref: D11W12)	S1WD Straight wide abutment
WIDE Two screws included *:		10 mm (Ref: D11WW10)	S1W8D Straight wide abutment

ANGULAR ABUTMENTS //

Product	t code	Available sizes	Additional info/p	arts	
Angular al		(Ref: D131511)	Two screws included * :		
S2LD Angular al	- 15° outment	15 mm (Ref: D131515)	LONG Two screws included *:		
Angular al		(Ref: D141515)	SLIM Two screws included *:		
S2D -	25° outment	11 mm (Ref: D132511)	Two screws included * :		
		15 mm (Ref: D132515)	Two screws included * :		
Angular al		(Ref: D142515)	SLIM Two screws included *:		
S2D -	35° outment	13 mm (Ref: D133513)	Two screws included * :		
S2D - Angular al	45°		Two screws included * :		

Recommended tightening torque max. 25 Ncm for the screw.

ANATOMIC ANGULAR ABUTMENTS //

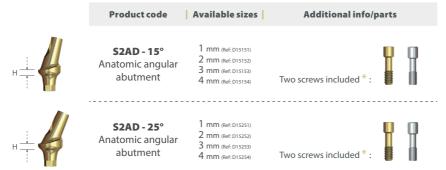


Recommended tightening torque max. 25 Ncm for the screw.* Gold screw for the final restoration, silver screw is suitable for the laboratory.

^{*} Gold screw for the final restoration, silver screw is suitable for the laboratory.





ZIRCONIUM ABUTMENTS //

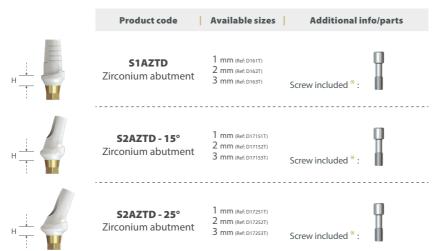


Recommended tightening torque max. 25 Ncm for the screw.

* Screw for the final restoration.

.

TEMPORARY (PEEK) ABUTMENTS //

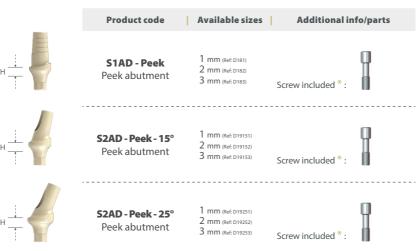

Recommended tightening torque max. 20 Ncm for the screw.

* Screw for the final restoration.

ABUTMENTS FOR BARS //



Product code	Available sizes	Additional info/parts
S1TD Abutment	Package contains: plastic without hex 0.5 mm (Ref: D8015) 1.5 mm (Ref: D8015) 2.5 mm (Ref: D8025) 3.5 mm (Ref: D8035)	Optional:

Recommended tightening torque max. 25 Ncm for the screw.

ABUTMENTS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code	
P-T3 Plastic transfer (Ref. M80) PMP-T3 Peek crown Immediate loading (Ref. M80b)	1 mm (Ref. D791) 2 mm (Ref. D792) 3 mm (Ref. D793) 4 mm (Ref. D794)	T3D Abutment	T THE
PM-T3 Plastic crown Immediate loading (Ref: M80a)	1 mm (Ref: D79201) 2 mm (Ref: D79202) 3 mm (Ref: D79203) NEW	T3D, 20° Abutment	

+

T3D - Smart Solution: transfer / immediate loading or temporary loading abutment (Contains: 2 x T3D, P - , PMP - , PM-T3)

!

Recommended tightening torque max. 15 Ncm for the screw.

EASY-FIX FOR IMMEDIATE LOADING //

Additional i	info/parts	Available sizes	Product code	
T1-54	S4a - Plastic (Ref. C83)	0.5 mm (Ref: D2605) 1.5 mm (Ref: D2615) 2.5 mm (Ref: D2625) 3.5 mm (Ref: D2635)	S4D Abutment	# H
TP-S4	S4a - Peek (Ref: CB4)	1 mm (Ref: D32171/C43) 2 mm (Ref: D32172/C43)	S4 - S7D - 17°	
H - S4	T-S4	3 mm (Ref: D32173/C43)	Abutment	
A1 - S4	₽ P-S4	1 mm (Ref: D32301/C43) 2 mm (Ref: D32302/C43) 3 mm (Ref: D32303/C43)	S4 - S7D - 30° Abutment	- H

Recommended tightening torque max. 20 Ncm for the screw.

MULTI-UNITS FOR IMMEDIATE LOADING //

Additiona	l info/parts	Available sizes	Product code	
T1 - S6/S7 (Ref: C34)	PH - S6/57 (Ref: C37)	0.5 mm (Ref: D3105) 1.5 mm (Ref: D3115) 2.5 mm (Ref: D3125) 3.5 mm (Ref: D3135)	S6D Straight multi-unit abutment	# H
		1 mm (Ref: D32171) 2 mm (Ref: D32172) 3 mm (Ref: D32173)	S7D - 17° Multi-base angular abutment	
H - S6/S7 (Ref: C33) A1 - S6/S7	P - S6/S7 (Refc C38) T - S6/S7	1 mm (Ref: D32301) 2 mm (Ref: D32302) 3 mm (Ref: D32303)	S7D - 30° Multi-base angular abutment	<u>→</u> н



THE-ONE MULTI-UNIT ABUTMENTS //

	Product code	Available sizes	Additional in	nfo/parts
н <u>т</u>	S16DS Multi-unit abutment	1 mm (Ref: D641) 2 mm (Ref: D642) 3 mm (Ref: D643) 4 mm (Ref: D644) 5 mm (Ref: D645)	Closed tray	T
H	S17DS - 17° Multi-unit abutment	1 mm (Ref: D65171) 2 mm (Ref: D65172) 3 mm (Ref: D65173) 4 mm (Ref: D65174) 5 mm (Ref: D65175)	T3 - \$16\$/\$17\$ (Ref: C72) H - \$16\$/\$17\$	T - \$16\$/\$17\$ (Ref: C69) (Ref: C95) TW - \$16\$/\$17\$
H	S17DS - 30° Multi-unit abutment	1 mm (Ref. D65301) 2 mm (Ref. D65302) 3 mm (Ref. D65303) 4 mm (Ref. D65304) 5 mm (Ref. D65305)	(Ref: CG6) Open tray T1 - 5165/5175 (Ref: C76)	(Ref: C73) P - \$165/\$175 (Ref: C71)
H	S17DS - 45° Multi-unit abutment	1 mm (Ref: D65451) 2 mm (Ref: D65452) 3 mm (Ref: D65453) 4 mm (Ref: D65454) 5 mm (Ref: D65455)	A1 - S165/S17S (Ref: C68)	PH - 5165/5175 (Ref: CB5)

Recommended tightening torque max. 20 Ncm for the screw.

!

OVERDENTURE - BALL ATTACHMENTS //

	Product code	Available sizes	Additional info/parts
HI W	S3D Ball-attachment	1 mm (Ref: D201) 2 mm (Ref: D202) 3 mm (Ref: D203) 4 mm (Ref: D204) 5 mm (Ref: D205) 6 mm (Ref: D206)	S3D Package contains: Metal cap (Ref. C21) Standard silicone (Ref. C22) Protective Disk (Ref. C122)
HI W	S3 - S7D - 17° Ball-attachment	1 mm (Ref: D32171/C4205) 2 mm (Ref: D32172/C4205) 3 mm (Ref: D32173/C4205)	S3-57D Package contains: Metal cap (Ref. C21) Standard silicone (Ref. C22) Protective Disk (Ref. C122) Ball 0.5mm (Ref. C4205)
HI.	S3 - S7D - 30° Ball-attachment	1 mm (Ref: D32301/C4205) 2 mm (Ref: D32302/C4205) 3 mm (Ref: D32303/C4205)	Optional: Hard silicone (Ref: C22) Standard silicone (Ref: C23) Soft silicone (Ref: C24) Ball 1mm (Ref: C421) Ball 2mm (Ref: C422) Transfer T1-53 (Ref: C27)

Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE SMART-LOCK ABUTMENTS //

Additional info/parts Available sizes | Product code Straight package: Metal cap (Ref: C50) 1 mm (Ref: D451) Laboratory (Ref: C54) 2 mm (Ref: D452) S8D 3 mm (Ref: D453) Hard (Ref: C51) 4 mm (Ref: D454) Abutment Medium (Ref: C52) 5 mm (Ref: D455) Soft (Ref: C53) 6 mm (Ref: D456) Protective Disk (Ref. C122) T1-S8 Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) 1.5 mm (Ref: D461515) S8D - 15° Hard (Ref: C51b) 3 mm (Ref: D46153) Abutment Medium (Ref: C52) Magic Tool Soft (Ref. C53) Protective Disk (Ref: C122)


Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE EASY-FIX ABUTMENTS //

Additional info/parts	Available sizes	Product code	
Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52) Protective Disk (Ref: C122)	1 mm (Ref: D571) 2 mm (Ref: D572) 3 mm (Ref: D573) 4 mm (Ref: D574) 5 mm (Ref: D575) 6 mm (Ref: D576)	S5D Abutment	
Angular package: Metal cap (Ref. C50) Laboratory (Ref. C54) Hard (Ref. C51b) Soft (Ref. C53)	1 mm (Ref. D32171/C441) 2 mm (Ref. D32172/C441) 3 mm (Ref. D32173/C441)	S5 - S7D - 17° Abutment	- -
Protective Disk (Ref. C122) 55 - 57 1 mm (Ref. C441) 2 mm (Ref. C442) Optional: Transfer T1-55 (Ref. C58) (Ref. C58)	1 mm (Ref: D32301/C441) 2 mm (Ref: D32302/C441) 3 mm (Ref: D32303/C441)	S5 - S7D - 30° Abutment	



HEALING CAPS //

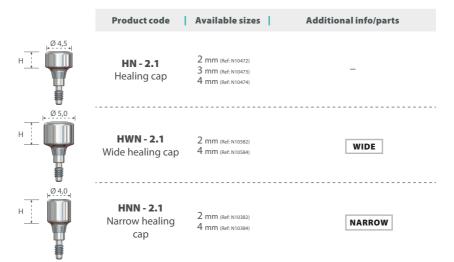

OPEN TRAY TRANSFERS //

Product code | Available sizes | Additional info/parts

T1N - 2.1
Transfer | 15 mm (Ref. N76) -

CLOSED TRAY TRANSFERS //




Recommended tightening torque max. 10 Ncm for the screw.

ANALOG / IMPLANT ANALOG //




INDIVIDUAL ABUTMENTS //

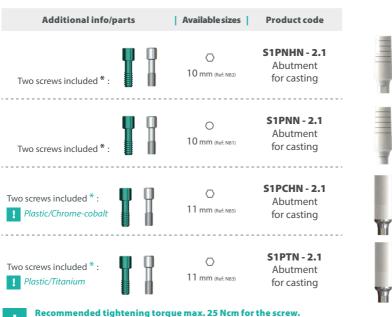

Recommended tightening torque max. 25 Ncm for the screw.

* Green screw for the final restoration, silver screw is suitable for the laboratory.

FLAT CONNECTION //

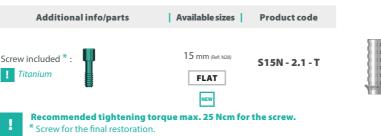



STRAIGHT ABUTMENTS //

	Product code	Available sizes	Additional info/parts
	S1N - 2.1 Straight abut- ment	9 mm (Ref: N119)	Two screws included *:
	S1WN - 2.1 Straight wide abutment	9 mm (Ref: N11W9)	WIDE Two screws included *:
H	S1AN - 2.1 Anatomic straight abutment	1 mm (Ref: N121) 2 mm (Ref: N122)	Two screws included *:


Recommended tightening torque max. 25 Ncm for the screw.

ANGULAR ABUTMENTS //

	Product code	Available sizes	Additional info/parts	
	S2N - 2.1, 15° Angular abutment	10 mm (Ref: N1315)	Two screws included * :	
	S2N - 2.1, 25° Angular abutment	10 mm (Ref: N1325)	Two screws included * :	
н	S2AN - 2.1, 15° Anatomic angular abutment	1 mm (Ref: N15151) 2 mm (Ref: N15152)	Two screws included * :	
н	S2AN - 2.1, 25° Anatomic angular abutment	1 mm (Ref: N15251) 2 mm (Ref: N15252)	Two screws included *:	

Recommended tightening torque max. 25 Ncm for the screw.

ZIRCONIUM ABUTMENTS //

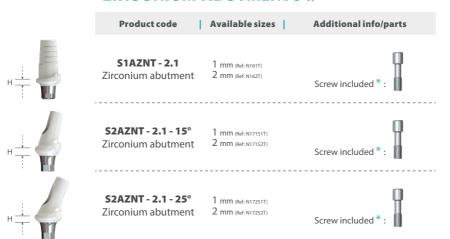




^{*} Green screw for the final restoration, silver screw is suitable for the laboratory.

^{*} Green screw for the final restoration, silver screw is suitable for the laboratory.





TEMPORARY (PEEK) ABUTMENTS //

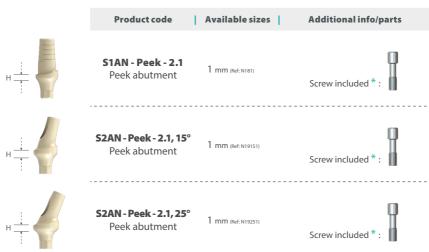


Recommended tightening torque max. 20 Ncm for the screw.

* Screw for the final restoration.

!

ABUTMENTS FOR BARS //

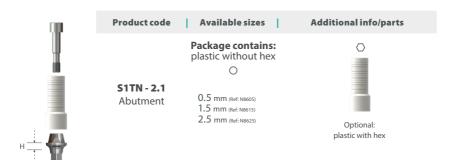

Recommended tightening torque max. 25 Ncm for the screw.

!

MULTI-UNITS FOR IMMEDIATE LOADING //



PROSTHETIC ACCESSORIES

OVERDENTURE - BALL ATTACHMENTS //

Ac	lditional info/parts	Available sizes	Product code	
	Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)	1 mm (Ref. N201) 2 mm (Ref. N202) 3 mm (Ref. N203) 4 mm (Ref. N204)	S3N - 2.1 Ball-attachment	TH I
	Optional: Hard silicone (Ref: C22) Soft silicone (Ref: C24) Transfer T1-S3 (Ref: C27)	1 mm (Ref. NZON1) 2 mm (Ref. NZON2) 3 mm (Ref. NZON3) 4 mm (Ref. NZON4)	S3NN - 2.1 Ball-attachment	T H

Recommended tightening torque max. 25 Ncm for the screw

OVERDENTURE S-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code	
Package contains:			
Metal cap (Ref: C116)			
Laboratory (Ref: C117)	1		
Extra soft (Ref: C118)	1 mm (Ref: N1121) 2 mm (Ref: N1122)	S35N - 2.1	— і ПП ТН
Soft (Ref: C119)	3 mm (Ref: N1123)	Abutment	
Standard (Ref: C120)	(ici.ivi.zs)		
Strong (Ref: C121)			
Protective Disk (Ref: C122)			

Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE SMART-LOCK ABUTMENTS //

А	dditional info/parts	Available sizes	Product code	
8	Transfer T1-55 (Ref: C58) Analog A1-55 (Ref: C59) S5 - S7 1 mm (Ref: C411)	1 mm (Ref: N571) 2 mm (Ref: N572) 3 mm (Ref: N573) 4 mm (Ref: N574)	S5N - 2.1 Abutment	Н
	2 mm (Ref. C442) Straight package: Metal Cap (Ref. C50) Laboratory (Ref. C54) Medium (Ref. C52)	1.5 mm (Ref:N321715/C/41) 2.5 mm (Ref:N321725/C/41)	S5 - S7N - 17° Abutment	<u></u>
	Angular package: Metal cap (Ref. CSD) Laboratory (Ref. CS4) Hard (Ref. CS1b) Soft (Ref. CS3)	1.5 mm (Ref:N323015/C441) 2.5 mm (Ref:N323025/C441)	S5 - S7N - 30° Abutment	<u></u>


Recommended tightening torque max. 20 Ncm for the screw.




HEALING CAPS //

		Product code	Available sizes	Additional info/parts
H	Ø 4.7 *I	H - 3.75 Healing cap	1 mm (Ref: M10471) 2 mm (Ref: M10472) 3 mm (Ref: M10473) 4 mm (Ref: M10474) 5 mm (Ref: M10475) 6 mm (Ref: M10476)	Suitable for all implant diameters.
H	5,8 4	HW - 3.75 Wide healing cap	3 mm (Ref: M10583) 5 mm (Ref: M10585)	WIDE Suitable for all implant diameters.
H :	Ø 7,0 -	HW7 - 3.75 Wide healing cap	3 mm (Ref: M10703) 5 mm (Ref: M10705)	WIDE Suitable for all implant diameters.
H	8.0	HW8 - 3.75 Wide healing cap	3 mm (Ref: M10803) 5 mm (Ref: M10805)	WIDE Suitable for all implant diameters.
H :	Ø 3.8	HN - 3.75 Narrow healing cap	3 mm (Ref: M10383) 5 mm (Ref: M10385)	NARROW Suitable for all implant diameters.

OPEN TRAY TRANSFERS //

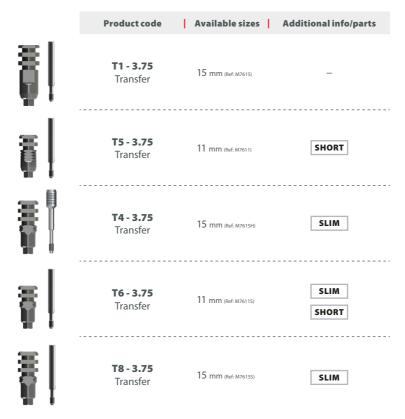

CLOSED TRAY TRANSFERS //

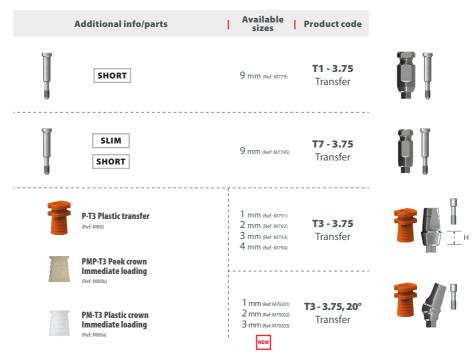

Recommended tightening torque max. 10 Ncm for the screw.

ANALOG / IMPLANT ANALOG //


Additional info/parts	Available sizes	Product code	
		A1 - 3.75	
_	12 mm (Ref: M08)	Analog	






	Product code	Available sizes	Additional info/parts
	CK - 3.75, 0°	(Ref: M81)	position checking tool - 0°
15°	CK - 3.75, 15°	(Ref: M8115)	position checking tool - 15°
25°	CK - 3.75, 25°	(Ref: M8125)	position checking tool - 25°
35°	CK - 3.75, 35°	(Ref: M8135)	position checking tool - 35°
45°	CK - 3.75, 45°	(Ref: M8145)	position checking tool - 45°

INDIVIDUAL ABUTMENTS //

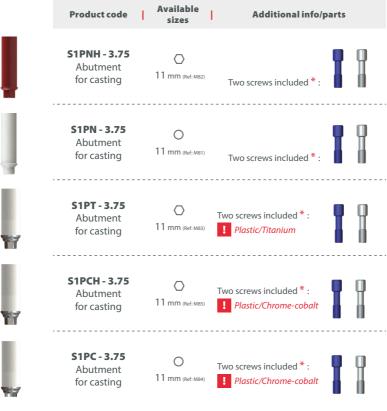

FLAT CONNECTION //

* Screw for the final restoration.

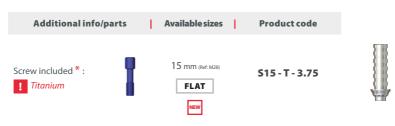


Recommended tightening torque max. 25 Ncm for the screw.

TEMPORARY RESTORATION //



STRAIGHT ABUTMENTS //

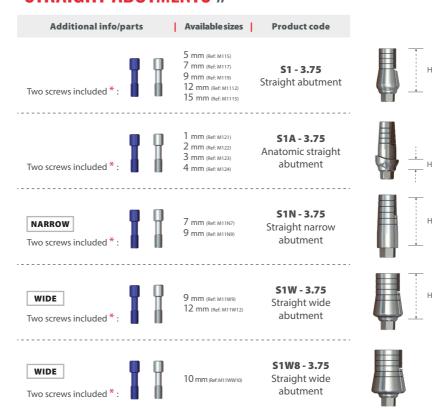

Recommended tightening torque max. 25 Ncm for the screw.



Product code	Available sizes	Additional info/pa
S2 - 3.75, 15° Angular abutment		Two screws included * :
S2L - 3.75, 15° Angular abutment	15 mm (Ref: M131515)	LONG Two screws included *:
S2S - 3.75, 15° Angular abutment	15 mm (0.4 mm/s)	SLIM Two screws included *:
S2 - 3.75, 25° Angular abutment	11 mm (Ref:M132511)	Two screws included * :
Angular abutment		LONG Two screws included *:
S2S - 3.75, 25° ngular abutment	15 mm (Ref: M142515)	SLIM Two screws included *:
S2 - 3.75, 35° Angular abutment	13 mm (Ref: M133511)	Two screws included * :
S2 - 3.75, 45° Angular abutment		Two screws included *:

* Blue screw for the final restoration, silver screw is suitable for the laboratory.


ANATOMIC ANGULAR ABUTMENTS //



Recommended tightening torque max. 25 Ncm for the screw.




WHY CHOOSE SGS DENTAL SYSTEM?

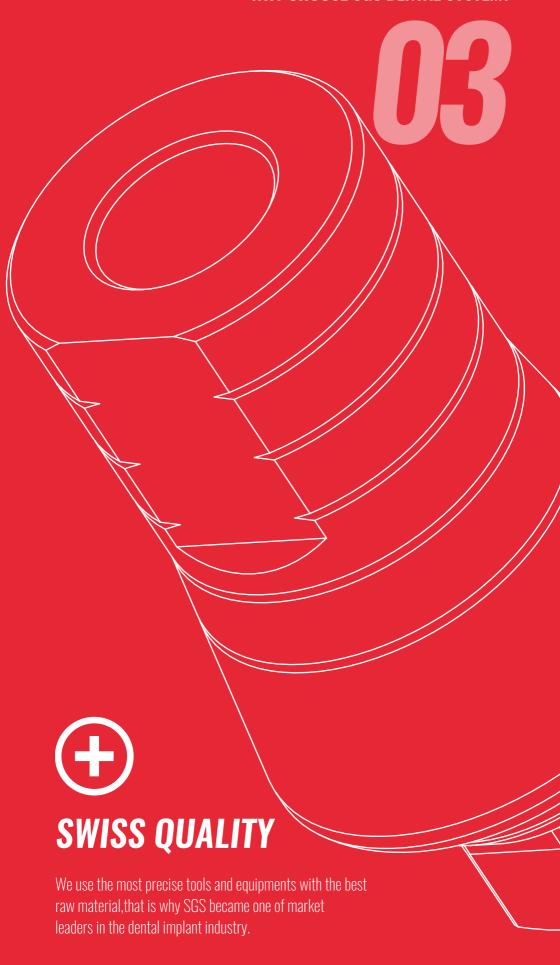



ZIRCONIUM ABUTMENTS //

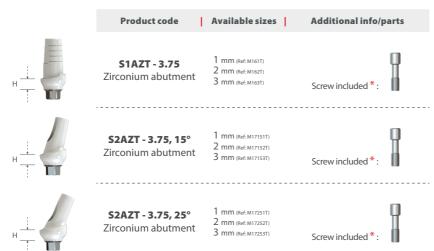


Recommended tightening torque max. 25 Ncm for the screw.

* Screw for the final restoration.

ļ

TEMPORARY (PEEK) ABUTMENTS //

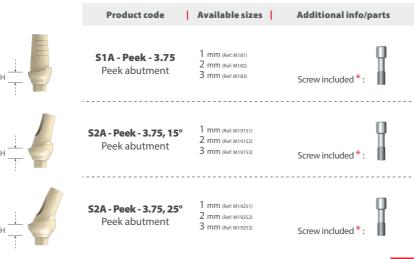


Recommended tightening torque max. 20 Ncm for the screw.

* Screw for the final restoration.

!

ABUTMENTS FOR BARS //

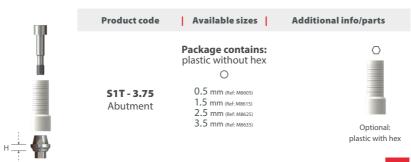

Recommended tightening torque max. 25 Ncm for the screw.

ABUTMENTS FOR IMMEDIATE LOADING //



- loading abutment (Contains: 2 x T3, P , PMP , PM-T3)
- Recommended tightening torque max. 15 Ncm for the screw.

EASY-FIX FOR IMMEDIATE LOADING //

Additional inf	o/parts	Available sizes	Product code	
T1-54	S4a - Plastic (Ref: C83)	0.5 mm (Ref: M2605) 1.5 mm (Ref: M2615) 2.5 mm (Ref: M2625)	S4 - 3.75 Abutment	H +
TP-S4	S4a - Peek (Ref: C84)	1 mm (Ref: M32171/C43) 2 mm (Ref: M32172/C43) 3 mm (Ref: M32173/C43)	S4 - S7 - 3.75, 17° Abutment	THE STA
A1 - 54	T P-S4	1 mm (Ref: M32301/C43) 2 mm (Ref: M32302/C43) 3 mm (Ref: M32303/C43)	S4 - S7 - 3.75, 30° Abutment	I I I H

Recommended tightening torque max. 15 Ncm for the screw.


MILITI-LINITS FOR IMMEDIATE LOADING //

MIDEII-ON	1113 1011	INIMILDIAI	L LUADING	//
Additional	info/parts	Available sizes	Product code	
T1 - \$6/\$7 (Ref: C34)	PH - S6/S7 (Ref: C37)	0.5 mm (Ref. M3105) 1.5 mm (Ref. M3115) 2.5 mm (Ref. M3125) 3.5 mm (Ref. M3135)	S6 - 3.75 Straight multi-unit abutment	н
(reer: L.S4)	(Net: .37)	1 mm (Ref: M32101/C40) 2 mm (Ref: M32102/C40)	S7 - 3.75, 10° Multi-base angular abutment	1
H - S6/S7 (Ref: C33)	P - S6/57 (Ref: C38)	1 mm (Ref: M32171/C40) 2 mm (Ref: M32172/C40) 3 mm (Ref: M32173/C40)	S7 - 3.75, 17° Multi-base angular abutment	1 → 1
A1 - 56/57 (Ref: C35)	T - \$6/\$7 (Ref: C36)	1 mm (Ref: M32301/C40) 2 mm (Ref: M32302/C40) 3 mm (Ref: M32303/C40)	\$7 - 3.75, 30° Multi-base angular abutment	₩

32



THE-ONE MULTI-UNIT ABUTMENTS //

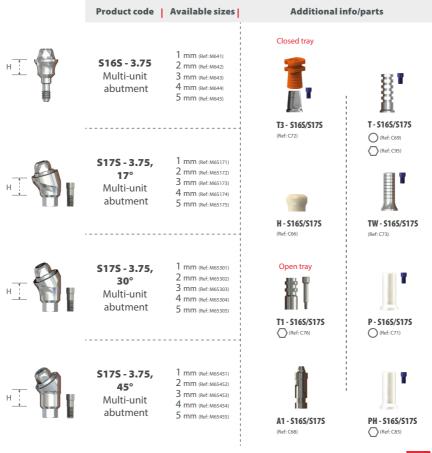

Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE - BALL ATTACHMENTS //

	Product code	Available sizes	Addition	al info/parts
н	S3 - 3.75 Ball-attachment	1 mm (Ref. M201) 2 mm (Ref. M202) 3 mm (Ref. M203) 4 mm (Ref. M204) 5 mm (Ref. M205) 6 mm (Ref. M206)	Pla D	S3 - 3.75 Package contains: Metal cap (Ref.C21) Standard silicone (Ref.C23) Protective Disk (Ref.C122)
3	S3 - S7 - 3.75, - 17° Ball-attachment	1 mm (Ref: M32171/C4205) 2 mm (Ref: M32172/C4205) 3 mm (Ref: M32173/C4205)		\$3-\$7-3.75 Package contains: Metal cap (Ref. C21) Standard silicone (Ref. C33) Protective Disk (Ref. C122) Ball 0.5mm (Ref. C4205)
HI T	S3 - S7 - 3.75, - 30° Ball-attachment	1 mm (Ref: M32301/C4205) 2 mm (Ref: M32302/C4205) 3 mm (Ref: M32303/C4205)	H = 1	Optional: Hard silicone (Ref: C22) Standard silicone (Ref: C23) Soft silicone (Ref: C24) Ball 1mm (Ref: C421) Ball 2mm (Ref: C422) Transfer T1-53 (Ref: C37)

Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE SMART-LOCK ABUTMENTS //



Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE EASY-FIX ABUTMENTS //

Additional info/parts	Available sizes Product code
Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52) Protective Disk (Ref: C122)	1 mm (Ref: M571) 2 mm (Ref: M572) 3 mm (Ref: M573) 4 mm (Ref: M574) 5 mm (Ref: M575) 6 mm (Ref: M576)
Angular package: Metal cap (Ref: Cso) Laboratory (Ref: Cs4) Hard (Ref: CS1b) Soft (Ref: CS3)	1 mm (Ref-M32171/C441) 2 mm (Ref-M32173/C441) 3 mm (Ref-M32173/C441) Abutment
Protective Disk (Ref. C122) 55 - 57 1 mm (Ref. C441) 2 mm (Ref. C442) Optional: Transfer	1 mm (Ref: M32301/C441) 2 mm (Ref: M32303/C441) 3 mm (Ref: M32303/C441) Abutment



HEALING CAP //

Product code	Additional info/parts



H-S4 Healing cap

TRANSFERS //

	Product code	Additional info/parts
	T1-S4 Transfer	! Open tray
30	TD 64	

[Closed tray

ANALOG //

Plastic

Product code	Additional info/parts
A1 - S4 Analog	_

ABUTMENTS //

Product code	Additional info/parts
S4a-Plastic	Temporary click-on abutment
S4a-Peek	Temporary click-on abutment (long-term)
T-S4	○ ○ Immediate loading titanium sleeve
P-S4	○ ○ Immediate loading plastic sleeve/casting

KEYS/DRIVERS //









BASIC SURGICAL KIT //



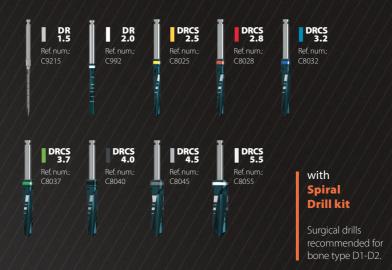


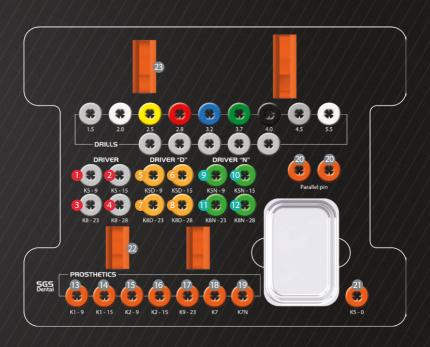

BASIC SURGICAL KIT //





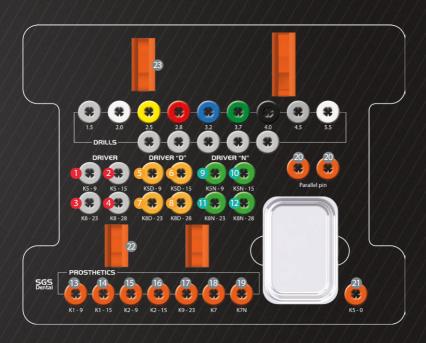




ADVANCED SURGICAL KIT //






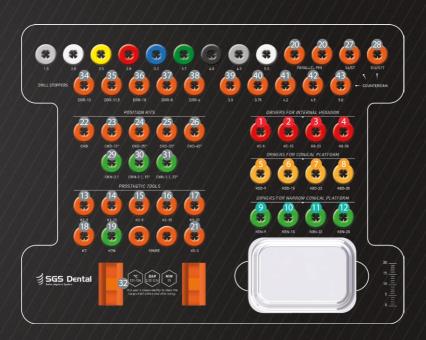




Surgical Kits



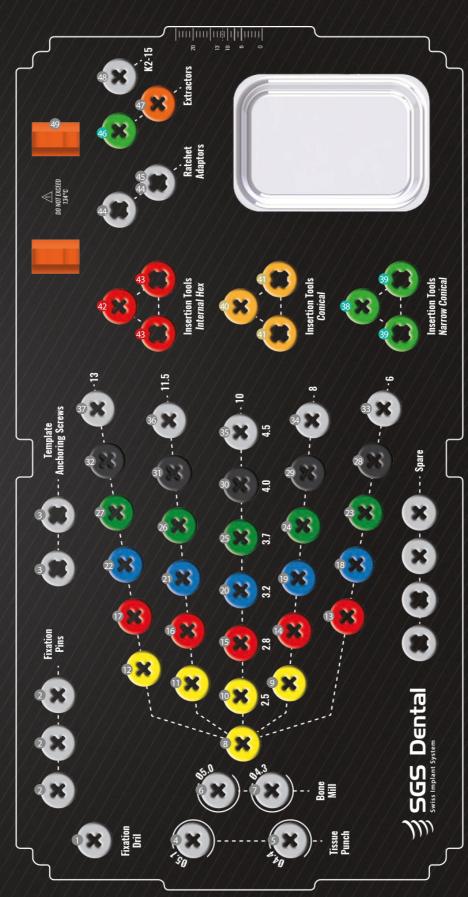

Surgical Kits

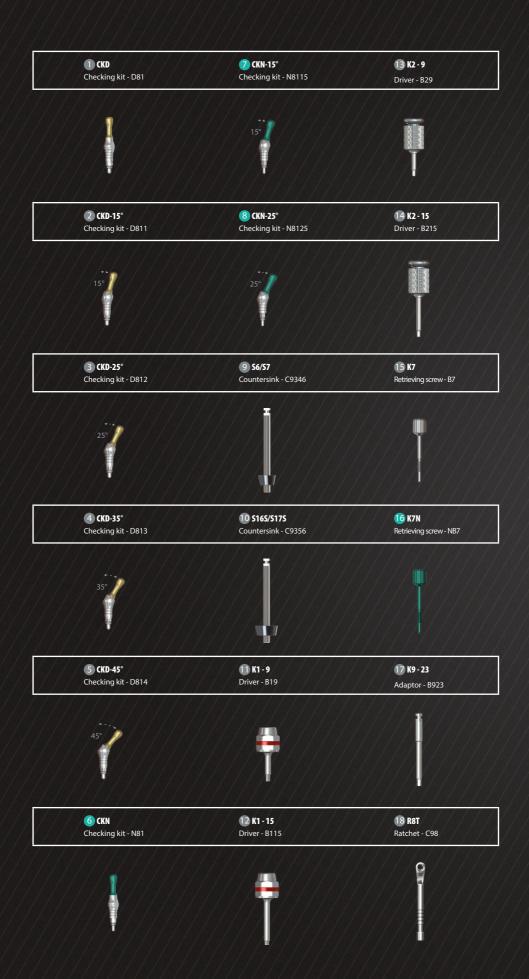




CONICAL STOPPER DRILL KIT //

				1////	/////	
L6 Ø 2.0 Ref. num.: C10126	L6 Ø 2.5 Ref. num.: C105256	L6 Ø 2.8 Ref. num.: C105286	L6 Ø 3.2 Ref. num.: C105326	L6 Ø 3.7 Ref. num.: C105376	L6 Ø 4.0 Ref. num.: C105406	L6 Ø 4.5 Ref. num.: C105456
	Į Į	ļ	ļ	ļ		
L8 Ø 2.0 Ref. num.: C10128	L8 Ø 2.5 Ref. num.: C105258	L8 Ø 2.8 Ref. num.: C105288	L8 Ø 3.2 Ref. num.: C105328	L8 Ø 3.7 Ref. num.: C105378	L8 Ø 4.0 Ref. num.: C105408	L8 Ø 4.5 Ref. num.: C105458
	ļ					
L10 Ø 2.0 Ref. num.: C101210	L10 Ø 2.5 Ref. num.: C1052510	L10 Ø 2.8 Ref. num.: C1052810	L10 Ø 3.2 Ref. num.: C1053210	L10 Ø 3.7 Ref. num.: C1053710	L10 Ø 4.0 Ref. num.: C1054010	L10 Ø 4.5 Ref. num.: C1054510
	1	1	1	1	1	1
L11,5 Ø 2.0 Ref. num.: C101211	L11,5 Ø 2.5 Ref. num.: C1052511	L11,5 Ø 2.8 Ref. num.: C1052811	L11,5 Ø 3.2 Ref. num.: C1053211	L11,5 Ø 3.7 Ref. num.: C1053711	L11,5 Ø 4.0 Ref. num.: C1054011	L11,5 Ø 4.5 Ref. num.: C1054511
					I	
L13 Ø 2.0 Ref. num.: C101213	L13 Ø 2.5 Ref. num.: C1052513	L13 Ø 2.8 Ref. num.: C1052813	L13 Ø 3.2 Ref. num.: C1053213	L13 Ø 3.7 Ref. num.: C1053713	L13 Ø 4.0 Ref. num.: C1054013	L13 Ø 4.5 Ref. num.: C1054513
			Ì		I	ļ

SKD-C CONICAL STOPPER DRILL KIT

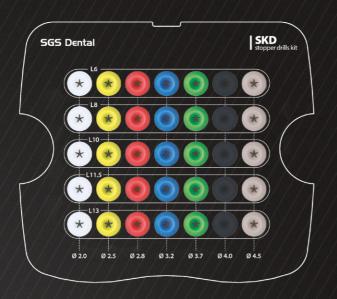



OTHER DRILLS // EXTRA DRILLS

DR - 1.5 Marker drill

DR-E Drilling extension

DR-T 4/5 Ref. num.: C9445

DR-T 5/6 Ref. num.: C9456

Material: stainless steel



SHORT DRILLS // EXTRA DRILLS

1	DRS - 2.0 Ø 2.0 Ref. num.: C1002	DRS - 2.5 Ø 2.5 Ref. num.: C10025	DRS - 2.8 Ø 2.8 ■ Ref. num.: C10028	DRS - 3.2 Ø 3.2 ■ Ref. num.: C10032	DRS - 3.7 Ø 3.7 Ref. num.: C10037	DRS - 4.0 Ø 4.0 Ref. num.: C10040	DRS - 4.5 Ø 4.5 ■ Ref. num.: C10045	DRS - 5.5 Ø 5.5 Ref. num.: C10055

CONICAL PLATFORM (P5D, P5G, P1D, P7D) //

Scanning Abutment



For lab use and intra-oral

Titanium Base

Single tooth

Bridges/bars



STCSD with hex 🔘 0.35 mm 1.5 mm

2.5 mm

Intended to be used for custom

casting prosthetic restorations

on single or multiple implants

STCSD without hex 🔾 0.35 mm 1.5 mm 2.5 mm

Intended to be used for custom casting prosthetic restorations only on multiple implants

Digital analog



A1D - Digital

Titanium Base

Sirona titanium base

ZirkonZahn titanium base



CS-STCD with hex 🔘 0.35 mm 1.5 mm



CZ-STCD with hex 🔘 0.35 mm

Intended to be used for custom casting prosthetic restorations on single or multiple implants Intended to be used for custom casting prosthetic restorations only on multiple implants

NARROW CONICAL PLATFORM (P7N) //

Scanning Abutment



For lab use and intra-oral

Titanium Base

Single tooth

Bridges/bars



STCN - 2.1 with hex 🔾

0.35 mm

STCNN-2.1 without hex 🔾

 $0.35 \, \text{mm}$

Intended to be used for custom casting prosthetic restorations on single or multiple implants

Intended to be used for custom casting prosthetic restorations only on multiple implants

Digital analog



A1N - Digital

PLATFORM 3.75 (P1, P7) //

Scanning Abutment



For lab use and intra-oral

Titanium Base

Single tooth

Bridges/bars



STCS - 3.75 with hex 🔘 0.35 mm

1.5 mm 2.5 mm

Intended to be used for custom

casting prosthetic restorations

on single or multiple implants



STCS - 3.75 without hex 🔾

0.35 mm 1.5 mm 2.5 mm

Intended to be used for custom casting prosthetic restorations only on multiple implants

Digital analog



A1 - Digital -3.75

Titanium Base

Sirona titanium base

ZirkonZahn titanium base



CS-STCwith hex 🔘 0.35 mm

1.5 mm



CZ-STC with hex 🔘 0.35 mm

Intended to be used for custom casting prosthetic restorations on single or multiple implants Intended to be used for custom casting prosthetic restorations only on multiple implants



For lab use and intra-oral

Titanium Base

Single tooth

Bridges/bars



Intended to be used for custom casting prosthetic restorations on single or multiple implants



Intended to be used for custom casting prosthetic restorations only on multiple implants

Digital analog





Screw for S6-S7

\$16\$-\$17\$ //

Scanning Abutment

SPCS - S16S/S17S (Ref: C79) 0

For lab use and intra-oral

Titanium Base

Single tooth

Bridges/bars



Õ

Intended to be used for custom casting prosthetic restorations on single or multiple implants



Intended to be used for custom casting prosthetic restorations only on multiple implants

Digital analog



Screw



Screw for S6-S7



MILLING ABUTMENT OPTIONS //





SIB-3.75-AG



SIB-3.75-AR



SIB-3.75-DS (Ref: M0111)



SIB-3.75-KV



SIB-3.75-MD1



SIB-3.75-MD16 (Ref: M0114)



SIB-3.75-ZZ (Ref: M0115)

Blue screw for the final restoration.



Conical Platform



SIBD-AG (Ref: D0109)



SIBD-AR (Ref: D0110)



SIBD-KV





SIBD-MD16 (Ref: D0114)



Gold screw for the final restoration.



Narrow Conical Platform



SIBN-2.1-AR (Ref: N0110)



SIBN-2.1-DS (Ref: N0111)









Green screw for the final restoration.



Supported By











Dental Wings, 3shape, AmannGirrbach, Zirkonzahn and Exocad are trademarks or registered trademarks of their respective owners: Dental Wings LLC., 3Shape A/S, Amann Gribbach AG, Zirconzahn USA Inc., Exocad GmbH.

Ask our colleauges for detailed instructions and download links to library data.

Titanium Bases and Scan Bodies for Laboratory and Clinic usage

The Titanium Bases offer a wide array of options for the user, offering the options of both Single Tooth (Anti-Rotation) and Bridge (Free-Rotation) as well as Libraries containing Direct-to-Implant options.

Both options are offered in two available heights of 0.5mm and 1.5mm for the Internal HEX 3.75 Platform as well as the Double-Connection Conical 3.5 platforms, and in 1.0mm for the Narrow Conical 2.1 platform.

For an accurate reading of the implant positioning into the CAD software, Scan Bodies are used within the laboratory to capture the correct position, orientation and rotation of the analogs placed within the working model or directly from the patient via usage of a an appropriate Scanner to translate the Implant's/Analog's position into the CAD/CAM system. The scan bodies are scanned and detected optically and the information is transferred digitally in-order to produce individual abutments as well as crowns and bridge framework by usage of the CAD/CAM technology.

Immediate Benefits

- Compatible with a wide array of CAD/CAM systems
- Longevity made possible by usage of highest quality PEEK material for the Scan Bodies and Titanium Grade 5 for the Titanium Bases
- Bio-Compatibility
- Autoclavability
- Removable screw for easy maintenance and cleaning
- Easy to Scan body geometry for the Scan Body
- Libraries containing Direct-to-Implant support options as well
- Discrete choice of either Single Tooth (Anti-Rotation) or Bridge (Free-Rotation) at the user's disposal
- Milled crowns result in tight tolerance results for optimum accuracy and compatibility with Implants and Screws for a smooth operation

SIMPLICITY GUARANTEES SUCCESS

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.



SGS Dental Implant System Holding - Zn Talhofstrasse 9, CH-9000 St. Gallen, Switzerland

FL-9494, Schaan, Landstrasse 27 Liechtenstein Tel.: 00423 233 5050, 00423 233 5051 Fax: 00423 233 5052

SGS International Kft./Ltd. Worldwide Logistic Center

H-1047 Budapest, Károlyi István u. 1-3. Tel: +36 1 328 0427 www.sgs-dental.com

